


SQUARE CAPILLARY THERMOMETER

type 2137 37x37mm, type 2145 45x45mm
capillary 500-3000mm

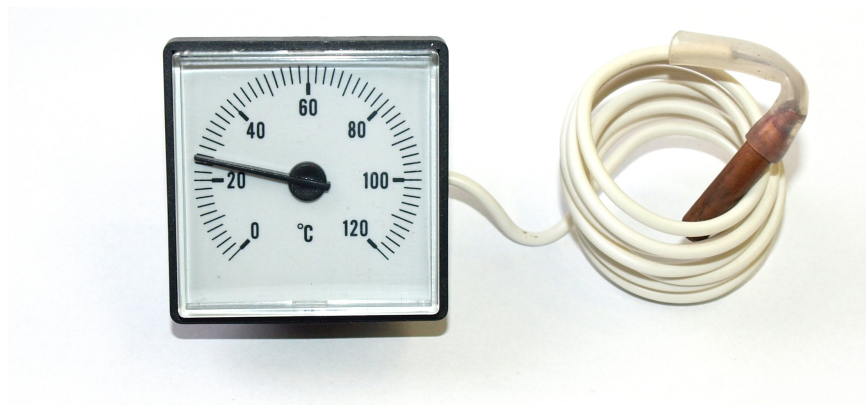

Specification:

Capillary thermometers are designed for all applications, where the place of measuring is not identical with the place of reading. They may be used in all kinds of operations due to the wide range of types and versions. Frequently used for boilers, heating and cooling systems.

Type	2137	2145
Dimension	37x37mm fitting 42x42mm including collar	45x45mm fitting 48x48 mm including collar
Temperature range	-40+40°C, 0-120°C, 50-350°C	
Capillary length, material	500, 1000, 1500, 2000, 3000 mm, Copper with PVC protection (-40+40°C, 0-120°C), stainless steel(50-350°C)	
Case	Plastic, white, black or grey colour	
Inspection hole	Transparent acryl	
Scale	Plastic, white, black or grey colour; printing and needle white, grey or black	
Sensor	Copper 8,5x30mm (-40+40°C) ; copper 6,5x30mm (0-120°C); stainless steel 3x80mm (50-350°C)	
Max case temperature	70°C	
Min capillary radius	5mm	

Dimensions:

Type	2137	2145
A	42	48
B	27	28
C	37	45
D	2,5	2,5
E	6	6
F	2	3
G	37	45,5
H	37	45,5
I	0,8	0,8

