


ROUND CAPILLARY THERMOMANOMETER

type 3040 Ø40mm, type 3052 Ø52mm

capillary 500-2000mm

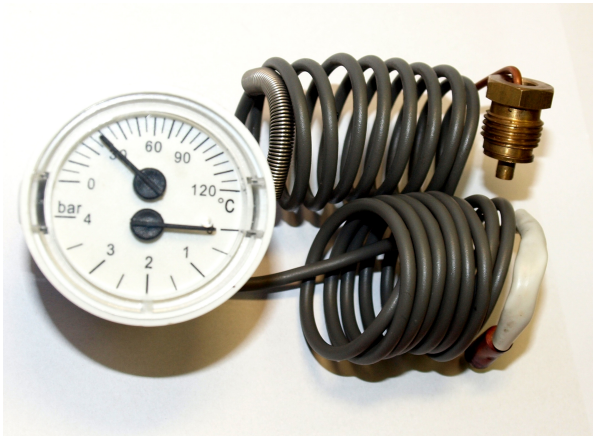

Specification:

Capillary thermomanometers are designed for all applications, where place of measuring is not identical with place of reading. They may be used in all kinds of operations due to the wide range of types and versions. Frequently used for boilers, heating and other applications, where pressure measuring is essential.

Type	3040	3052
Diameter	40mm	52mm
Temp/ Pressure range	0-120°C 0-4 bar; 0-120°C 0-6 bar	
Capillary length, material	500, 1000, 1500, 2000 copper with PVC protection	
Case	Plastic, white, grey or black design	
Inspection hole	Transparent acrylglass	
Dial	Plastic, white, grey or black design , writing white, grey or black	
Connecting thread	G1/4, M14x1,mounting wrench 14	
Sensor size	6,5x25mm	
Max case temperature	70°C	
Min capillary radius	5mm	

Dimensions:

Type	1040	1052
A	43	57,5
B	30	28,5
C	40	52
D	4	4
E	3,5	7,5
F	33,5	36
G	40,5	53,5
H	41,5	52,5
I	0,8	0,8
J	11,5	11,5

