


HEATING ELEMENT WITH REGULATION TRG 13

type TRG 13
1 500-12 000W

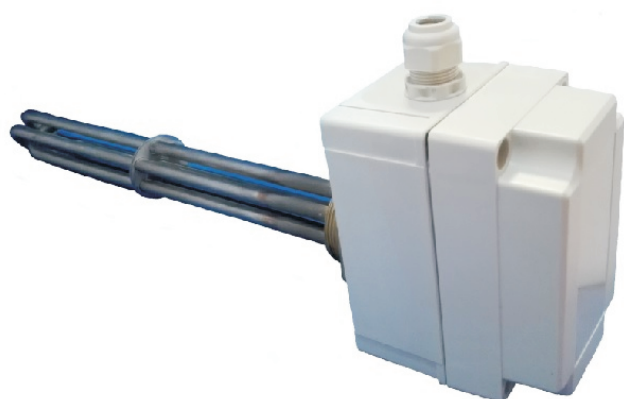

DESCRIPTION:

- heating element with inbuilt regulation including thermal fuse
- connection material: steel, brass, stainless steel 17 248/1.4541
- rods material: steel, brass, stainless steel 17 248/1.4541, Incoloy 800

APPLICATION:

- food industry
- mechanical engineering
 - power engineering
 - heating
 - hydraulics

TECHNICAL PARAMETERS:

- power: 1 500, 2 000, 2 400, 3 000, 4 000, 4 500, 6 000, 7 500, 9 000, 12 000W
- regulatory range/ T fuse: 0-40°C/55°C; 7-77°C/99°C; 20-127°C/150°C; 30-85°C/110°C; 50-150°C/180°C
- thread: M48x2, G6/4 or individual
- power supply: 230/400V
- protection: IP 66

SPECIFICATION:

Heating element consists of two parts. Heating part is made of three U-shaped heating rods (made of mentioned materials) which are connected to the head by M48x2 or G11 thread. Terminal board is made of plastic cast with IP 66. Other component parts are a regulatory capillary thermostat in mentioned ranges, thermal fuse that protects the heating element from overheating, glow tube to indicate the current state (heating/not heating) and a regulatory knob with marked scale. Electric supply is possible from both sides through the OBO-VTEC bushing.

Heating element is designed for direct heating of any liquid (material of the element must be suited to the medium). During operation the element must be constantly immersed in the liquid up to the head. Suitable for operations, where immediate thermoregulation is essential.

Design „S” : not transparent case

Design „L” : transparent case with ON/OFF indicator

| Power (W) | Power Supply (V) | Immersed length L | Connection thread | Material | Regulatory range / thermal fuse |
|-----------|------------------|-------------------|---|--|---|
| 1500 | 230/400 | 290 | M48x2, G 6/4" atypical connections: G5/4", Clamp 100, flange according to DIN | brass, stainless steel 17248/1.4541, Incoloy 800 | 0-40°C / 55°C 7-77°C / 99°C 20-127°C / 150°C 30 – 85°C / 110°C 50-150°C / 180°C |
| 2000 | 230/400 | 290 | | | |
| 2400 | 230/400 | 290 | | | |
| 3000 | 230/400 | 290 | | | |
| 4000 | 230/400 | 310 | | | |
| 4500 | 230/400 | 335 | | | |
| 6000 | 230/400 | 435 | | | |
| 7500 | 230/400 | 610 | | | |
| 9000 | 230/400 | 670 | | | |
| 12000 | 230/400 | 810 | | | |


Adjustments on request: - shortened design
 - material working and surface finish of submersible rods
 - individual colour of the control terminal board
 - customized control (electronic thermostat, sensor Pt100, only thermal fuse, etc.)

Order code

Power Range / thermal fuse Thread Nut Connector mater. Material rods Individual

| Code | Power: mention in W determine from 1500-12000W |
|-------|---|
| Code | Range / thermal fuse |
| 1 | 0-40°C / 55°C |
| 2 | 7-77°C / 99°C |
| 3 | 20-127°C / 150°C |
| 4 | 30-85°C / 110°C |
| 5 | 50-150°C / 180°C |
| Code | Thread |
| M48 | M48x2 |
| G6/4" | G6/4" |
| O | other |
| Code | Nut |
| 1 | YES |
| 2 | NO |

| Code | Connector material |
|------|-------------------------------|
| M | brass |
| N | stainless steel 17248/1.4541 |
| O | other |
| Code | Rod material |
| M | brass |
| N | stainless steel 17 248/1.4541 |
| I | Incoloy 800 |
| Code | Individual |
| N | individual non-heating part |
| P | surface finish |
| T | other temperature ranges |
| O | other - specify |

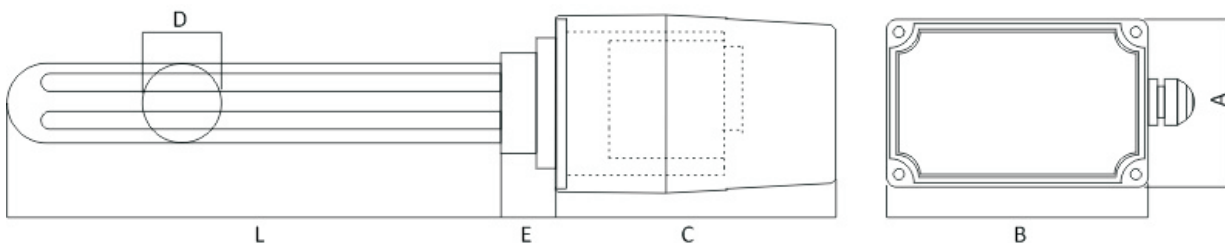

| Dimensions in mm | | | | | | |
|------------------|----|-----|-----|----|----|-----------------------------------|
| Type | A | B | C | D | E | L |
| TRG 13 | 80 | 125 | 120 | 38 | 22 | 290, 310, 335, 435, 610, 670, 810 |